


PRODUCT INFORMATION

800-Series Top Plate Castor

**Electrically conductive thermoplastic polyurethane
on nylon centre wheel**

| | |
|----------------------------|--------------------|
| Part number: | 510008 |
| Wheel diameter (D): | 160mm |
| Tread width (T2): | 40mm |
| Tread hardness: | 94° Shore A |
| Electrical conductivity: | $\leq 10^4 \Omega$ |
| Wheel bearing: | Ball bearings |
| Top plate size (AxB): | 135x110mm |
| Fixing hole spacing (axb): | 105x75-80mm |
| Fixing hole size (d): | 11mm |
| Brake pedal radius (G): | 162mm |
| Overall height (H): | 215mm |
| Load capacity 3km/h: | 360kg |
| Rolling resistance: | Very good |
| Operating noise: | Good |
| Floor preservation: | Good |

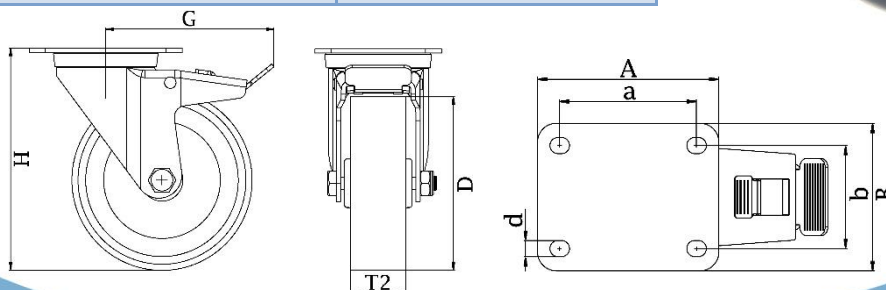

Telephone: (353) 1 452 0482
Email: info@parnells.eu

www.parnells.eu

Unit A1 - A2
Southcity Business Centre
Whitestown Way
Tallaght
Dublin D24 HT95
Ireland